


2000-PC and 5000-PC UV Light-Curing Flood Systems

DYMAX UV light-curing flood lamps offer moderate to high intensity UV curing over a 127 x 127 mm or 200 x 200 mm area. Curing in 5-30 seconds is typical using DYMAX light-curable adhesives. These lamps are available with or without shutters and shielding and are simple to operate. DYMAX UV flood lamps can be used as benchtop curing systems or easily integrated into automated assembly systems. These flood lamps offer the industry's most consistent intensity over the 2,000 hour bulb warranty.

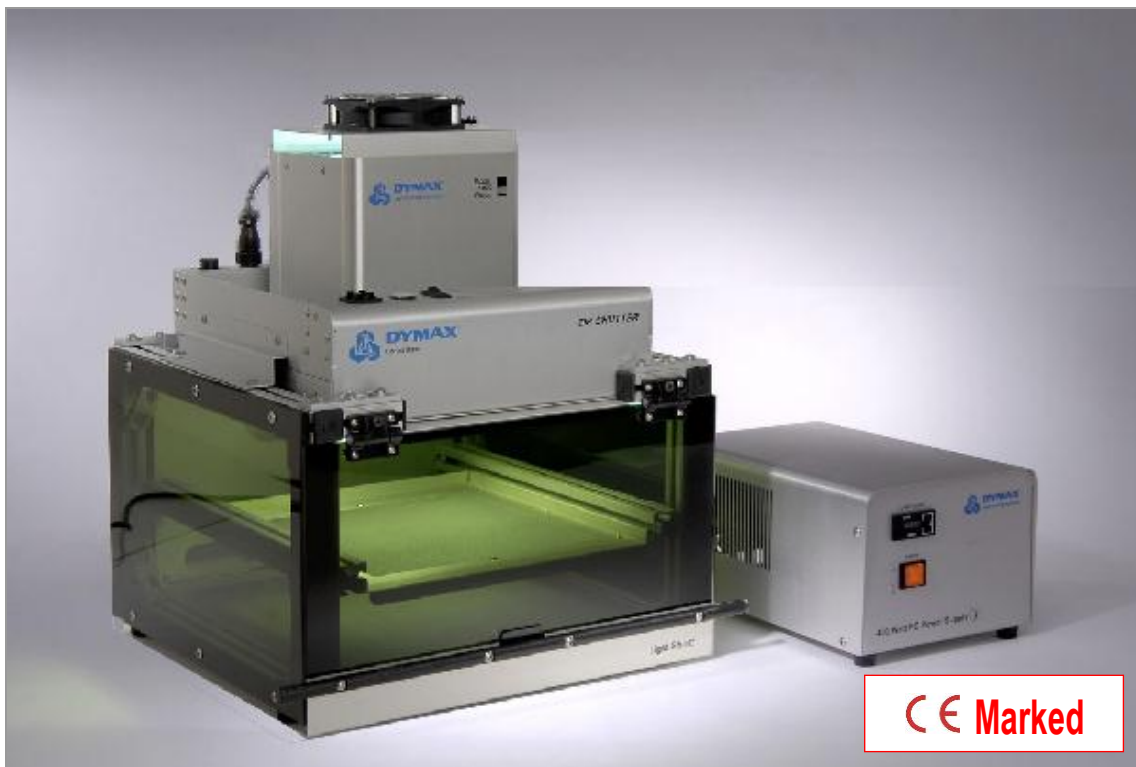

DYMAX 5000-PC UV Light-Curing Flood Lamp Shown with ZIP™ Shutter and Light Shield enclosure

FEATURES	
Powerful UV-curing lamps (up to 225 mW/cm ²) ¹	Two bulb options (shortwave or longwave)
Large curing area (127 x 127 mm or 200 x 200 mm)	Adjustable lamp height
Typical cure times of 5-30 seconds	Bulbs are warranted for 2,000 hours
Shutter that can be actuated by foot pedal or PLC	100% shielding with safety interlock available

¹ Measured with a DYMAX ACCU-CAL™ 50 Radiometer (320-395 nm) at a lamp height of 76 mm using a standard metal halide bulb.

2000-PC and 5000-PC UV Light-Curing Flood Lamps

The 2000-PC and 5000-PC modular UV light-curing flood lamps offer moderate-to-high intensity over a large area (up to 200 x 200 mm). By adding shielding and/or shutters, these UV light-curing flood lamps can be used as either turnkey benchtop systems or integrated into an automated assembly process. Either lamp may be fitted with bulbs that produce primarily shortwave UV, primarily longwave UV, or primarily visible light.




2000-PC modular power supply and housing, 200 x 200 mm curing area
CE Marked




5000-PC modular power supply and housing, 127 x 127 mm curing area
CE Marked

SPECIFICATIONS	2000-PC Modular	5000-PC Modular
Part Number	38003	38005
Initial Intensity	75 mW/cm ²	225 mW/cm ²
Curing Area	200 x 200 mm	127 x 127 mm
Working Distance	50 – 150 mm	50 – 150 mm
Dimensions (L x W x H)	<u>Power Supply:</u> 203 mm x 318 mm x 165 mm <u>Reflector Housing:</u> 267 mm x 229 mm x 178 mm	<u>Power Supply:</u> 203 mm x 318 mm x 165 mm <u>Reflector Housing:</u> 165 mm x 152 mm x 152 mm
Bulb Warranty	2,000 hours	
Typical Degradation	< 20% over 2,000 hours	
Power Requirements	90-265V, 50-60 Hz	
Replacement Bulb Part Numbers	38560 Metal Halide (Standard, UVA, Longwave) 36970 Mercury (UVB, Shortwave) 36658 Visible	

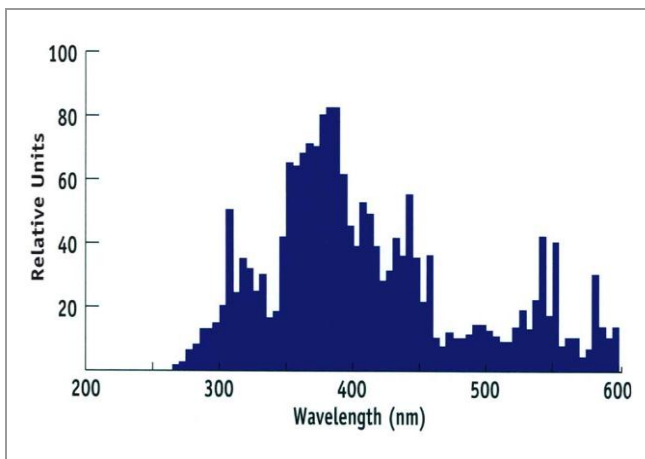


2000-PC and 5000-PC UV light-curing flood lamps spectral distribution using a standard metal-halide bulb (PN **38560**)

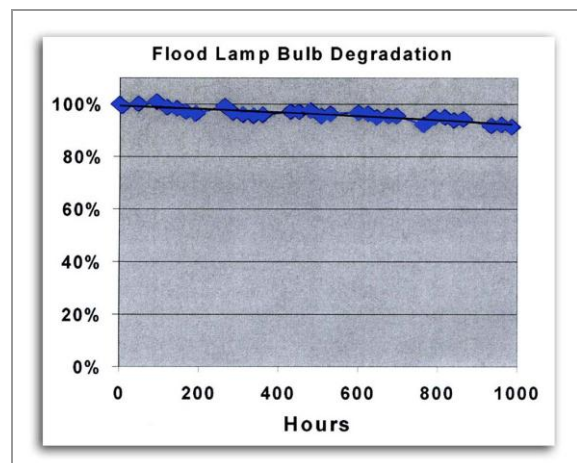


The intensity generated by DYMAX flood systems is very consistent. With continuous use, bulb degradation of less than 20% over the first 1,000 hours is typical. On/off cycles will accelerate bulb degradation.

Shutters

DYMAX UV light-curing flood lamps require a five (5) minute warm up and five (5) minutes to cool down. For that reason, it is not practical to control exposure by turning lamps on/off. Shutters, however, can be used to control exposure time. DYMAX offers the following shutters for use with the 2000-PC and 5000-PC UV light-curing flood systems.

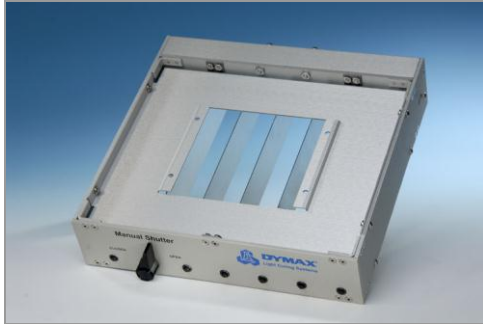

Manual shutter shown open – CE Marked

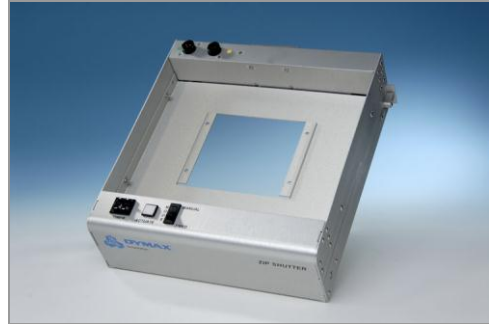


ZIP™ shutter shown open – CE Marked

Manual Shutter		ZIP™ Shutter	
Part Number	35572	Part Number	37863 38071 - Replacement Curtain
Dimensions (L x W x H)	282 mm x 287 mm x 64 mm	Dimensions (L x W x H)	343 mm x 299 mm x 114 mm
Description	Low cost louvered shutter. Simple hand turn knob opens and closes shutter.	Description	Electronic, curtain-style shutter. Actuated via finger switch, foot pedal, or customer supplied switch (or PLC).

Shielding

DYMAX offers two shielding options for its UV light-curing flood systems, a mounting stand kit, and a Light Shield.

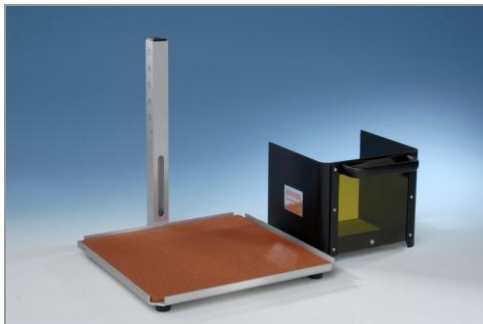

Shown: 5000-PC mounting stand kit



Light Shield shown open with sliding tray out
CE Marked

Mounting Stand Kits		Light Shield	
Part Number	38289 - 5000-PC Mounting Stand Kit 38290 - 2000-PC Mounting Stand Kit	Part Number	38125
Dimensions (L x W)	5000-PC: 178 mm x 155 mm 2000-PC: 216 mm x 274 mm	Inside Dimensions (L x W x H)	379 mm x 269 mm x 203 mm
Description	A simple and cost effective 3-sided shield that is removed manually. Not compatible with DYMAX shutters.	Outside Dimensions (L x W x H)	429 mm x 320 mm x 274 mm
		Safety Interlock	38402 - Optional Kit (closes shutter if door is opened mid-cycle)
		Description	360° shielding. Swing up door and slide out shelf. Compatible with DYMAX shutters.

Part Numbers for Various Lamp/Shutter/Shielding Combinations		
Description	2000-PC	5000-PC
Modular (no shielding or shutter)	38003	38005
With Mounting Stand	38003 + 38290	38005 + 38289
With Light Shield	38003 + 38125	38005 + 38125
With Light Shield and Manual Shutter	38003 + 38125 + 35572	38005 + 38125 + 35572
With Light Shield and ZIP™ Shutter	38003 + 38125 + 37863	38005 + 38125 + 37863



The ACCU-CAL™ 50 radiometer is simple to operate and offers repeatable measurement of UV light. The DYNAMX ACCU-CAL™ 50 can measure UV light emitted from lightguides (3 mm, 5 mm, and 8 mm), UV flood systems, and UV conveyors.

DYNAMX Equipment Literature		
Type	Description	European Literature Numbers
General	<i>Guide to Selecting and Using DYNAMX Light-Curing Systems</i>	Lit010AEU
	<i>DYNAMX UV Light-Curing Systems Safety Considerations</i>	Lit133
Light-Curing Spot Lamps	<i>BlueWave® 200 UV Light-Curing Spot Lamp</i>	Lit218EU
	<i>BlueWave® 75 UV Light-Curing Spot Lamp</i>	Lit238EU
	<i>BlueWave® LED Prime UVA Light-Curing Spot Lamp</i>	Lit268EU
UV Light Curing Flood Lamps	<i>2000-PC and 5000-PC UV Light-Curing Flood Lamps</i>	Lit206EU
UV Light Curing Conveyor Systems	<i>UVC-5 and UVC-8 UV Light-Curing Conveyor Systems</i>	Lit051EU
UV Radiometers	<i>ACCU-CAL™ 50 Radiometer</i>	Lit159EU

DYNAMX EQUIPMENT EVALUATION

Contact your DYNAMX representative to initiate the rental program of DYNAMX UV light-curing equipment.

© 2006-2010 DYNAMX Corporation. All rights reserved. All trademarks in this bulletin, except where noted, are the property of, or used under license by DYNAMX Corporation, U.S.A.

The data contained in this bulletin is of a general nature and is based on laboratory test conditions. DYNAMX Europe GmbH does not warrant the data contained in this bulletin. Any warranty applicable to products, its application and use is strictly limited to that contained in DYNAMX Europe GmbH's General Terms and Conditions of Sale published on our homepage http://www.dymax.com/de/pdf/dymax_europe_general_terms_and_conditions_of_sale.pdf. DYNAMX Europe GmbH does not assume any responsibility for test or performance results obtained by users. It is the user's responsibility to determine the suitability for the product application and purposes and the suitability for use in the user's intended manufacturing apparatus and methods. The user should adopt such precautions and use guidelines as may be reasonably advisable or necessary for the protection of property and persons. Nothing in this bulletin shall act as a representation that the product use or application will not infringe a patent owned by someone other than DYNAMX Corporation or act as a grant of license under any DYNAMX Corporation Patent. DYNAMX Europe GmbH recommends that each user adequately test its proposed use and application of the products before actual repetitive use, using the data contained in this bulletin as a general guide. LIT206EU 08/09/2007

DYNAMX Corporation
860.482.1010
info@dymax.com
www.dymax.com

DYNAMX Europe GmbH
+49 (0) 611.962.7900
info_de@dymax.com
www.dymax.de

DYNAMX UV Adhesives &
Equipment (Shenzhen) Co Ltd
+86.755.83485759
dymaxasia@dymax.com
www.dymax.com.cn

DYNAMX Asia
(Hong Kong) Ltd
+852.2460.7038
dymaxasia@dymax.com
www.dymax.com.cn

DYNAMX Korea LLC
82.2.784.3434
info@dymax.kr
www.dymax.co.kr

