


# Temporary masking that can withstand hot acid stripping

[DYMAX 729 SpeedMask](#) plating and harsh chemical maskant is a UV/visible light-curing masking resin that fully protects components and is capable of withstanding soaking in hot acid without permeation or seepage under the mask. It provides excellent surface and cavity protection of turbine components during acid-stripping, high-temperature plating processes, and other harsh chemical operations.

Its ability to cure in seconds maximises efficiency in production throughput. It can be applied by spray or dip, and can be easily removed by incineration with no residue remaining. It has application potential in machining (milling, grinding, turning), high-temperature plating processes, or acid stripping.

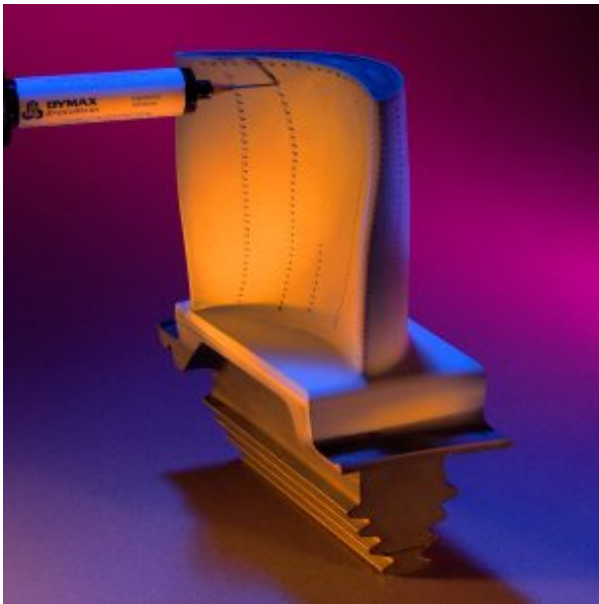

# Temporary masking that can withstand hot acid stripping

Supplied by:

**intertronics**

INTERTRONICS

12a Station Field Industrial Estate, Banbury Road, Kidlington

Oxfordshire England OX5 1JD

t 01865 842842 e [info@intertronics.co.uk](mailto:info@intertronics.co.uk)

Last updated: May 2018

Statements, technical information and recommendations contained herein are based on tests we believe to be reliable but they are not to be construed in any manner as warranties expressed or implied. The user shall determine the suitability of the product for his intended use and the user assumes all risk and liability whatsoever in connection therewith.