


## Temporary masking during acid stripping for aerospace/turbine applications

**DYMAX SpeedMask 729** UV/visible light-curable temporary mask provides excellent surface and cavity protection of turbine components during acid-stripping, high-temperature plating processes and other harsh chemical operations. This maskant has been formulated to withstand soaking in hot acid without permeation or seepage under the mask. When cured, the mask provides superior surface protection from chemical processing of nickel super alloys and high-temperature alloys. **SpeedMask 729** can be applied by spray or dip and is easily removed by incineration at 650°C+ with no residue left behind after removal.

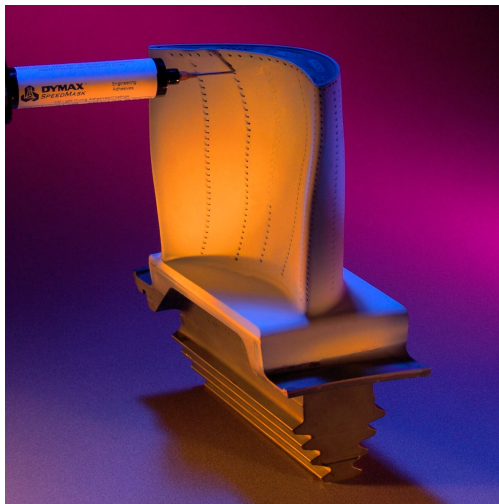

# Temporary masking during acid stripping for aerospace/turbine applications

Supplied by:

**intertronics**

INTERTRONICS

12a Station Field Industrial Estate, Banbury Road, Kidlington

Oxfordshire England OX5 1JD

t 01865 842842 e [info@intertronics.co.uk](mailto:info@intertronics.co.uk)

Last updated: April 2018

Statements, technical information and recommendations contained herein are based on tests we believe to be reliable but they are not to be construed in any manner as warranties expressed or implied. The user shall determine the suitability of the product for his intended use and the user assumes all risk and liability whatsoever in connection therewith.