

adhere academy: what is adhesive fixture time?




The **fixture time** for an adhesive (sometimes called the **set time**)

is the shortest time required by the adhesive to develop **handling strength** such that substrates can be removed from fixtures, unclamped, or handled without stressing the bond – stress which might affect the ultimate bond strength. We can define **handling strength** as a (relatively) low level of bond strength initially achieved by an adhesive which allows substrates to be handled, moved, or unclamped without causing disruption of the curing process or affecting the bond strength.

These are the definitions from ASTM Standard D 1144 *Standard Practice for Determining Strength Development of Adhesive Bonds*; the standard does not give any objective measure for determining handling strength, and so similar to [working life](#), it may depend on your own particular application.

adhere academy: what is adhesive fixture time?

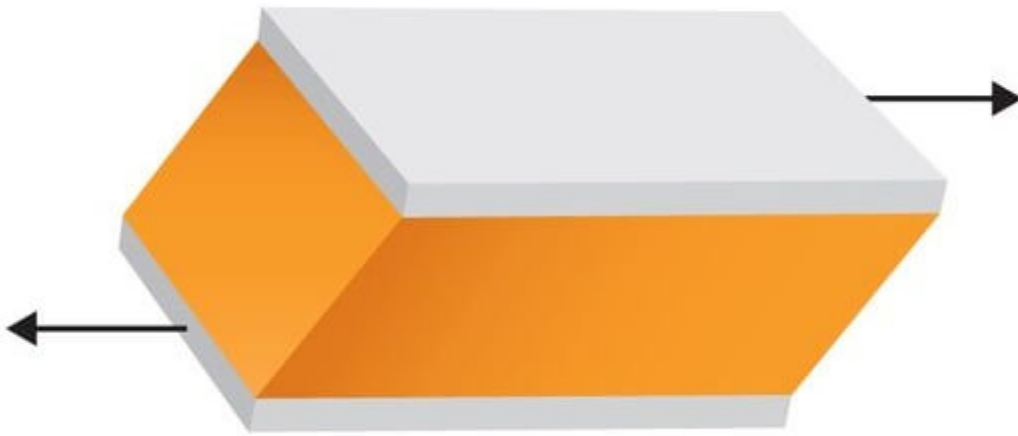

Adhesive shear strength

Some adhesive manufacturers are more specific in their product data sheets. For example, [Dymax](#) usually quote a fixture time defined as “the time to develop a shear strength of 0.1N/mm^2 between glass slides. Actual cure time typically is 3 to 5 times fixture time.” As Dymax’ UV curing adhesives have fixture times of seconds or fractions of a second, full cure is still very quick! By their nature, UV light curing adhesives will quickly reach full cure before being removed from any tooling or fixtures. In the case of parts bonded with slower curing adhesives (e.g. two part epoxies) which have full cures of minutes to hours, it may be expedient to remove the parts from fixtures before complete cure.

As part of your adhesive testing and process validation, a practical determination of the handling strength and fixture time for your specific project will be useful.

adhere academy: what is adhesive fixture time?

Supplied by:

intertronics

INTERTRONICS

12a Station Field Industrial Estate, Banbury Road, Kidlington

Oxfordshire England OX5 1JD

t 01865 842842 e info@intertronics.co.uk

Last updated: August 2019

Statements, technical information and recommendations contained herein are based on tests we believe to be reliable but they are not to be construed in any manner as warranties expressed or implied. The user shall determine the suitability of the product for his intended use and the user assumes all risk and liability whatsoever in connection therewith.