

FIS 790HP-LF High Pressure Dispensing Valve for High Viscosity Liquids: Silicones, RTVs, Greases, Sealants




Description

The **Fisnar 790HP-LF High Pressure Dispensing Valve** is designed to dispense high viscosity fluids such as **silicones, RTVs**, sealants, pastes and greases. The FIS 790HP-LF high pressure valve provides a snap-release shut off after dispensing, creating a suck-back effect that prevents any dripping.

Features & Benefits

- Designed to dispense high viscosity fluids including epoxies, UV adhesives, pastes, grease, silicones, sealants, RTVs
- Suitable for potting/filling
- Ability to dispense in dots, beads/lines, micro dots, micro beads
- High pressure fluid input up to 2500psi
- Available in aluminium or stainless steel
- Suck-back eliminates post-dispense dripping

FIS 790HP-LF High Pressure Dispensing Valve for High Viscosity Liquids: Silicones, RTVs, Greases, Sealants

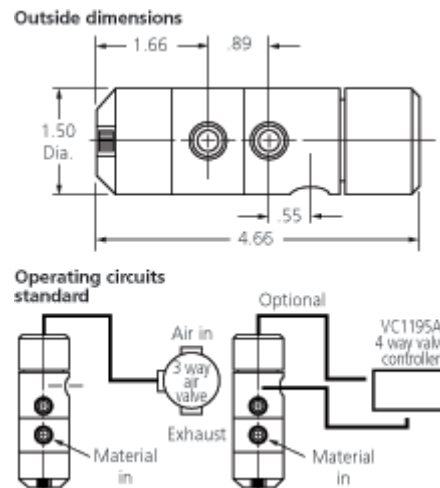

The FIS 790HP-LF is a high pressure dispensing valve which is also known as a “spool valve”. The material to be dispensed is supplied under pressure to the material inlet. The valve is opened and closed pneumatically, typically using a [dispensing controller](#). Applying a minimum of 50 psi to the air inlet will force the internal spool forward, dispensing the material. Releasing the air pressure allows an internal spring to snap the spool back, closing the valve. The spool shape helps to provide a suck back of the material, preventing drips and giving a clean cut-off of the dispense.

Specifications

FIS 790HP-LF High Pressure Dispensing Valve for High Viscosity Liquids: Silicones, RTVs, Greases, Sealants




Specification	
Construction	FIS 790HP-LF – Aluminium Valve Body FIS 790HPSS-LF – Stainless Steel Valve Body Aluminium inlet & outlet blocks
Material inlet	1/4" NPT
Air inlet (actuating)	1/4" NPT
Material outlet	1/4" NPT
Air pressure required	50 psi minimum
Maximum input pressure	2500 psi
Seals	O-ring – viton, seats are glass filled PTFE

Other Information

FIS 790HP-LF High Pressure Dispensing Valve for High Viscosity Liquids: Silicones, RTVs, Greases, Sealants



<div><p>CASE STUDY</p><p>intertronics adhesives, coatings, sealants & equipment for your manufacturing and technology applications</p><div><div><p>FS200N.1 Fisnar dispensing robot</p><p>790HP-LF High pressure dispensing valve</p><p>SL101N Digital liquid dispenser</p></div></div></div>	<p><u>Automated Sealant Dispensing Proves a Winner for Innovative Golfing Product</u></p> <p>An automated sealant dispensing system provided consistent and reliable results in this wearable technology application.</p>
--	--

See also our [Technical Articles and White papers](#) page to download [“Improving Industrial Dispensing with Pneumatic Dispensing Valves”](#) – a whitepaper about this technology.

Ordering Information

Specification	Description
---------------	-------------

**FIS 790HP-LF High Pressure Dispensing
Valve for High Viscosity Liquids:
Silicones, RTVs, Greases, Sealants**



FIS790HP-LF	High pressure dispensing valve – aluminium body
FIS790HPSS-LF	High pressure dispensing valve – stainless steel body

Let’s start by talking about your application

FIS 790HP-LF High Pressure Dispensing Valve for High Viscosity Liquids: Silicones, RTVs, Greases, Sealants



01865

842842



orders@intertronics.co.uk

- Name*
- Company*
- Phone*
- Email*
- Post code*

If you're in the UK, knowing your postcode would help us get in touch even more quickly. If you're outside the UK, please indicate your country.

-
- Tell us about your application

FIS 790HP-LF High Pressure Dispensing Valve for High Viscosity Liquids: Silicones, RTVs, Greases, Sealants



Any information that you submit using this form will be processed according to our [privacy policy](#).

■ Email

This field is for validation purposes and should be left unchanged.

Submit

Supplied by:

intertronics

INTERTRONICS

12a Station Field Industrial Estate, Banbury Road, Kidlington

Oxfordshire England OX5 1JD

t 01865 842842 e info@intertronics.co.uk

Last updated: November 2022 Version: 4.7

Statements, technical information and recommendations contained herein are based on tests we believe to be reliable but they are not to be construed in any manner as warranties expressed or implied. The user shall determine the suitability of the product for his intended use and the user assumes all risk and liability whatsoever in connection therewith.